


8-10, KITA-ITAMI, ITAMI  
HYOGO 664-0831 JAPAN  
Overseas Sales Department  
TEL: (81) 72-771-1112 / 1143  
FAX: (81) 72-772-7592  
http://www.okk.co.jp  
E-mail: ovsd@okk.co.jp

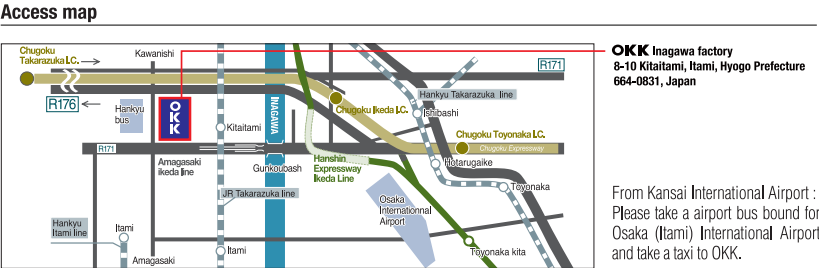

Technical Center

S-Plant

W-Plant

Technical center is for test cutting, demonstration and training.  
S-plant is for machining and assembly of spindles and tables.  
W-plant is for final assembly of large sized machining centers.  
All are located at Inagawa, Itami city, Hyogo, Japan

**INAGAWA PLANT:**  
8-10, KITA-ITAMI, ITAMI, HYOGO 664-0831 JAPAN  
TEL: (81) 72-782-5121  
FAX: (81) 72-772-5156  
E-mail: eigibu@okk.co.jp

OKK A DIVERSIFIED MANUFACTURER OF  
MACHINE TOOLS

- Specializes In:**  
Machining centers  
Graphite cutting machining centers  
Grinding centers  
CNC Milling machines  
Conventional milling machines  
Total die and mold making systems  
Flexible manufacturing cells and systems

**Other Products Include:**  
Textile Machinery  
Water Maters

**NOTE :**  
OKK reserves the right to change the information contained in  
this brochure wihtout notice.  
OKK is not responsible to make changes to previously sold  
machines or accessories.

The export of this product is subject to an authorization from  
the government of the exporting country.  
Check with the government agency for authorization.

**OKK USA CORPORATION**  
100 REGENCY DRIVE, GLENDALE HEIGHTS, IL 60139 USA  
TEL: (1) 630-924-9000  
FAX: (1) 630-924-9010  
http://www.okkcorp.com  
E-mail: okkusa@okkcorp.com

**OKK USA WESTERN REGIONAL OFFICE(LA)**  
17971 SKY PARK CIRCLE, SUITE D, IRVINE CA 92614 USA  
TEL: (1) 949-851-6800  
FAX: (1) 949-851-6888

**OKK CANADA OFFICE(CANADA)**  
7449 AUBURN ROAD, UNIT 1B HORNBY, ONTARIO, LOP 1EO, CANADA  
TEL: (1) 630-924-9000  
FAX: (1) 630-924-9010

**OKK EUROPE GmbH**  
HANSEMANNSTR. 33 41468 NEUSS GERMANY  
TEL: (49) 2131-29868-0  
FAX: (49) 2131-29868-41  
http://www.okkeurope.com  
E-mail: info@okkeurope.com

**THAI OKK MACHINERY CO., LTD.**  
KUMTHORN HOLDING BUILDING 2ND FLOOR 897-897/1 RAMA III  
ROAD BANGPONGPANG, YANNAWA, BANGKOK 10120 THAILAND  
TEL: (66) 2-683-2160-2  
FAX: (66) 2-683-2163

**OKK(SHANGHAI) CO., LTD.**  
ROOM C303, BUILDING 8, No.1221 HAMI ROAD CHANGNING  
DISTRICT SHANGHAI P.C200335 CHINA  
TEL: (86) 21-62700930  
FAX: (86) 21-62700931  
http://www.okk.com.cn  
E-mail: shanghai@okk.com.cn

**OKK CORPORATION SEOUL BRANCH**  
1203, E & C DREAM TOWER 8, 327-27, GASAN-DONG,  
GEUMCHEON-GU, SEOUL, 153-023 KOREA  
TEL: (82) 2-855-0416  
FAX: (82) 2-855-0426

**PT. OKK INDONESIA**  
WISMA NUSANTARA BUILDING 12 FLOOR,  
JL.M.H.THAMRIN No.59, JAKARTA. 10350 INDONESIA  
TEL: (62) 21-390-2563 / 2564  
FAX: (62) 21-390-2565

Vertical Machining Center

VB53




# Advanced High-quality Parts, Die & Mold Machining Compact Vertical Machining Center

## VB53




※Machine picture includes optional accessories


| Main Specification                  |                               |                                |   |
|-------------------------------------|-------------------------------|--------------------------------|---|
| Spindle speed                       | Rapid traverse rate (X, Y, Z) | Number of stored tools         | Tool exchange time                            |
| <b>100 to 20000min<sup>-1</sup></b> | <b>20m/min</b> (787ipm)       | <b>30tools</b>                 | <b>2 sec</b><br>(tool-to-tool)                |
| Standard Accessories                |                               | Standard Function              |   |
| Dual-contact spindle<br>(BT type)   | Linear scale<br>(X, Y, Z)     | HQ Control<br>Hyper HQ Control | Data Server (F31i-A)<br>Hard Disc Mode (N730) |

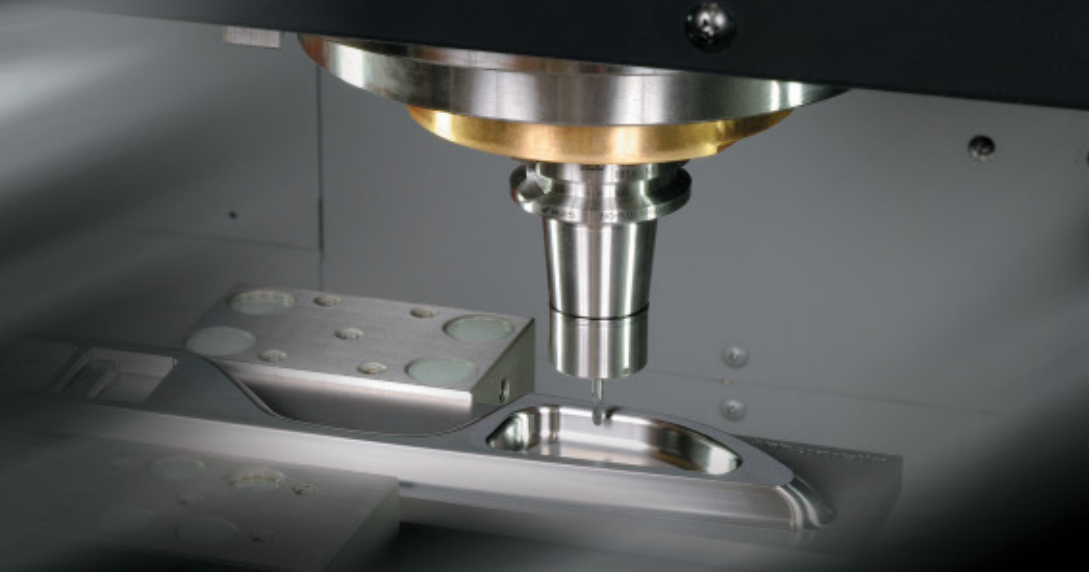


Compact with higher Accuracy  
and Quality



Loudspeaker  
Material:NAK80




Sample die  
Material:NAK80

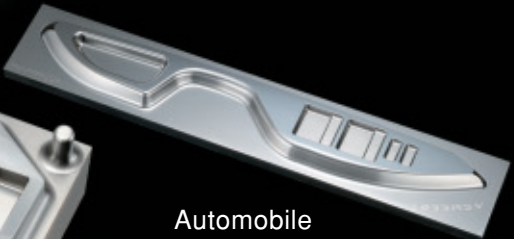


Automobile  
interior part  
Material:NAK80

### Space-saving with a Large Machining Area

Discharging chips to the left side of the machine, into the coolant tank located under the splash guarding has reduced the machine's floor space to 2595×2750mm(102.17"×108.27"). Resulting in superior productivity per unit area.

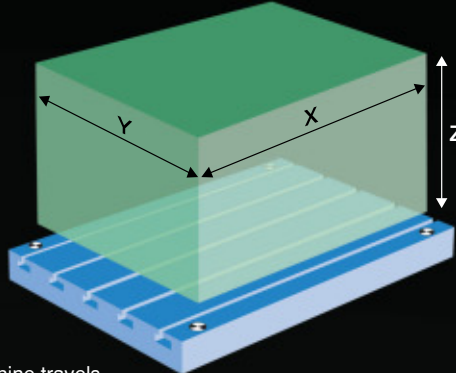

Machine travels  
X:1050mm (41.34") , Y:530mm (20.87") , Z axis:510mm (20.08")





High-accuracy Machining

HQ Control [Standard]  
Hyper HQ Control [Standard]

Pre-interpolation acceleration/deceleration function:

This function minimizes the machined shape errors and the reduction in the radius error when executing the circular cutting command.

Optimized corner deceleration function:


This function assesses the targeted machining program vector and decelerates at the corners producing highly accurate machined edges.

Feed forward control function:

This function enables the control to minimize servo errors. Combined with the Hyper HQ control, it improves the processing of minute line segment data to machine the free-form surfaces such as dies and enables a substantial increase in speed and accuracy.



Hyper HQ control consists of the high speed processor, used to process data for high-speed, precise machining of workpieces of any shape. This includes a look ahead multiple block (multi-buffer). It automatically detects the corner on parts from the NC part program, and controls the feedrate so that it does not exceed the machine's permissible acceleration rate.



Minute Line Segment Processing Capability:  
N730

| Specification            | Line segment processing speed | Command                   |
|--------------------------|-------------------------------|---------------------------|
| Hyper HQ control mode II | 151m/min (5945 ipm)           | G05 P2: ON<br>G05 P0: OFF |


Minute Line Segment Processing Capability:  
F31i-A

| Specification           | Line segment processing speed | Command                       |
|-------------------------|-------------------------------|-------------------------------|
| Hyper HQ control mode B | 150m/min (5906 ipm)           | G05.1 Q1: ON<br>G05.1 Q0: OFF |


\*The above values show (theoretical) maximum speeds for processing 1-mm-segment blocks constructing a straight line. Actual processing speeds depend on the type of the machine and NC data.

Accuracy


Surface roughness



Machined Position Accuracy





|   | (mm)               |
|---|--------------------|
| A | 150 (5.91")        |
| B | 212.132 (8.35165") |




| Item                | OKK tolerance    | Actual value example |
|---------------------|------------------|----------------------|
| Axial direction     | 0.015 (0.00059") | -0.004 (-0.00016")   |
| Diagonal direction  | 0.015 (0.00059") | -0.006 (-0.00024")   |
| Hole diameter error | 0.010 (0.00039") | 0.005 (0.00020")     |

- Notes:
1. The data show example which obtained in short run. It may differ from data obtained in continuous run.
  2. The data were obtained under OKK's test cutting conditions. The data may differ due to conditions of cutting tools, fixtures, cutting speed and room temperature.
  3. The above accuracies are subject to machine installed according to OKK specifications and constant temperature environment. Accuracy are based on OKK inspection standard.

Circular Cutting Accuracy



F : 2500mm/min (98.43ipm)  
Diameter : φ80mm (3.15")



| Item        | OKK tolerance     | Actual value example |
|-------------|-------------------|----------------------|
| Circularity | 0.0050 (0.00020") | 0.00185 (0.000073")  |

High-speed Spindle

Spindle speed:20000min<sup>-1</sup> [Standard]  
Dual-contact(BT type) [Standard]



The standard specification includes a 20000min<sup>-1</sup> Dual-contact spindle. The lightweight spindle head section achieves agile response.


Lubrication

The spindle bearing utilizes an oil-air lubrication method delivering stable lubrication property throughout the speed range.


Cooling

Working together the forced cooling oil is circulated in the bearing section and an air-cooling system circulates around the spindle motor to suppress heat and minimize the spindle's thermal displacement.

| MITSUBISHI                  |  |
|-----------------------------|--|
| Spindle motor specification | Low speed:100~4500min <sup>-1</sup> High speed:4501~20000min <sup>-1</sup> |
| Output                      | Continuous rating 7.5kW (10HP)   |
|                             | 30min rating 11kW (15HP)   |
|                             | 10min rating 11kW (15HP)   |
| Torque                      | Continuous rating 36N·m (27ft·lbs)   |
|                             | 30min rating 52N·m (38ft·lbs)  |
|                             | 10min rating 70N·m (52ft·lbs)  |

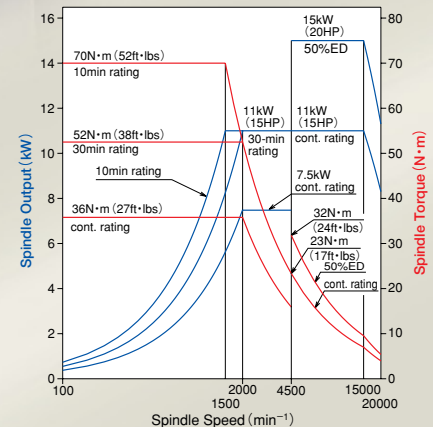


| FANUC                       |  |
|-----------------------------|--|
| Spindle motor specification | Low speed:100~5500min <sup>-1</sup> High speed:5501~20000min <sup>-1</sup> |
| Output                      | Continuous rating 7.5kW (10HP)   |
|                             | 30min rating 11kW (15HP)   |
|                             | 10min rating 11kW (15HP)   |
| Torque                      | Continuous rating 19N·m (14ft·lbs)   |
|                             | 30min rating 32N·m (24ft·lbs)  |
|                             | 10min rating 19N·m (14ft·lbs)  |

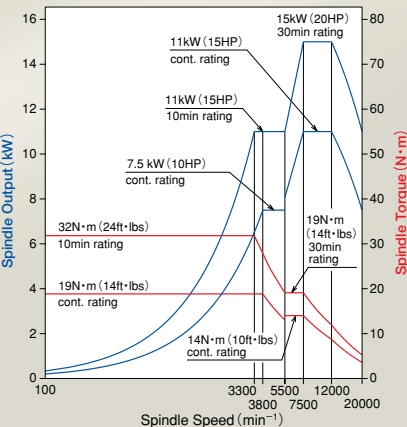

High Accessibility

Excellent operator accessibility to the machines work space reduces the operator's load.

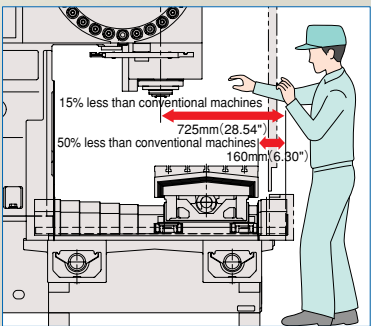

Powerfully Smooth Feed

The machine secures powerfully smooth feed operation by using the wide linear roller guides and high-resolution ball screws.



Chip Removability

Coil-Type Chip Conveyors [Standard]



The coil-type chip conveyors [Standard] are installed on the back and front of the table delivering excellent chip evacuation and space-savings.

Easy Maintenance


The lubrication unit and the pneumatic unit are centrally located on the machine's outside to facilitate the machine's maintenance work.





Peripheral Equipment (Optional Equipment)

Lift-up Chip Conveyor & Chip Bucket [Option]

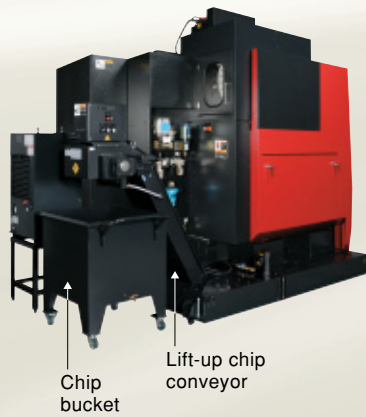

Suitable Lift-up Chip Conveyor according to Type of Chips

| Type of chip conveyor  |                      | Hinged type |         | Scraper type |         | Magnet scraper type |         | Scraper type with drum filter |         | Magnet scraper type with drum filter |         |
|------------------------|----------------------|-------------|---------|--------------|---------|---------------------|---------|-------------------------------|---------|--------------------------------------|---------|
|                        |                      | Use         | Not use | Use          | Not use | Use                 | Not use | Use                           | Not use | Use                                  | Not use |
| Type of chips          | Magnetizable chips   |             |         |              |         |                     |         |                               |         |                                      |         |
|                        | Steel                |             |         |              |         |                     |         |                               |         |                                      |         |
|                        | Short curl           | ○           | ○       | ○            | ○       | ○                   | ○       | ○                             | ○       | ○                                    | ○       |
|                        | Spiral               | ○           | ○       | △*2          | △*2     | △*2                 | △*2     | ×                             | -       | ×                                    | -       |
|                        | Long                 | ○           | ○       | ×            | ×       | ×                   | ×       | ×                             | -       | ×                                    | -       |
|                        | Needle shape         | ×           | △*1     | ×            | ○       | ○*3                 | ○       | ○                             | -       | ○                                    | -       |
|                        | Powder or small lump | ×           | △*1     | ×            | ○       | ○*3                 | ○       | ○                             | -       | ○                                    | -       |
|                        | Cast iron            |             |         |              |         |                     |         |                               |         |                                      |         |
|                        | Needle shape         | ×           | △*1     | ×            | ○       | ○*3                 | ○       | ○                             | -       | ○                                    | -       |
|                        | Powder or small lump | ×           | △*1     | ×            | ○       | ○*3                 | ○       | △*3                           | -       | ○                                    | -       |
| Non-magnetizable chips | Aluminum             |             |         |              |         |                     |         |                               |         |                                      |         |
|                        | Short curl           | ×           | ○       | △*4          | ○       | -                   | -       | ○                             | -       | ○                                    | -       |
|                        | Spiral               | ○           | ○       | ○            | ○       | -                   | -       | △*5                           | -       | △*5                                  | -       |
|                        | Long                 | ○           | ○       | ○            | ○       | -                   | -       | △*5                           | -       | △*5                                  | -       |
|                        | Needle shape         | ×           | △*1     | ×            | ○       | -                   | -       | ○                             | -       | ○                                    | -       |
|                        | Powder or small lump | ×           | △*1     | ×            | ○       | -                   | -       | ○                             | -       | ○                                    | -       |

\*1: Minute chips can enter the conveyor casing through a gap between hinged plates. Therefore, cleaning inside the conveyor frequently is needed.  
\*2: Long chips can easily be caught by a scraper. Therefore, measures for shortening the chips such as the step feed and removing the caught chips are needed.  
\*3: If the coolant flow rate is large, chips can flow out of the conveyor casing and cause clogging of filters. Therefore, combined use of a magnet plate is recommended.  
\*4: If the coolant flow rate is large, chips can flow out of the conveyor casing and cause clogging of filters. Therefore, cleaning filters frequently is needed.  
\*5: Long chips can easily be caught by a scraper. Therefore, removing them regularly is needed. Drum filters are damaged if they are not removed.

Measurement with Laser [Option]



Use of the laser sensor enables high-accuracy measurement of the tool length and diameter even for the ball-end mill with very small diameter.

Coolant Cooler [Option]



Increase in temperature of the cutting oil is a major cause of the thermal displacement. The coolant cooler suppresses cutting oil temperature fluctuations caused by the machining operation and stabilizes machining accuracy. The coolant cooler is recommended particularly when using oil-based cutting oil.

MQL (Oil-mist Lubricator) [Option]



The MQL is the machining method that applies minimal quantity of the cutting oil to the cutting tool. Since quantity of the oil used for machining is very small, it leads reduction in costs and is also environment-friendly.


MQL: Minimal Quantity Lubrication

Coolant-through Spindle [Option]

It is used when machining a deep hole, etc.

Air-through Spindle [Option]

It is used when machining a deep hole, etc.



Touch Sensor System [Option]



T1-A: Automatic workpiece measurement/compensation

The touch sensor attached to the spindle is moved to a workpiece in the automatic operation until it contacts the workpiece then based on the travel distance at that time, the required compensation amount is calculated and set as the data for the workpiece coordinate system. The measurement and compensation program is created according to the specified format and then executed.

T0: Manual workpiece measurement

This is helpful for the workpiece centering operation and the tool length measurement. The sensor can be moved to the desired measurement point by using handle mode. The machine starts measurement automatically when the sensor contacts the workpiece. The result of the measurement can be set as the data for the desired workpiece coordinate system or tool offset number in a simple operation.


OKK's Dedicated Control Functions

Maintenance Functions


Help Guidance [Standard]

It displays detailed information regarding the machine alarms and the method to recover when a problem occurs on the machine. It also displays a list of G-codes and description of the M signals.

Description of Alarm Display Screen

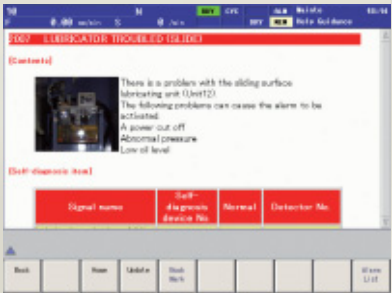


Description of M-signal Display Screen

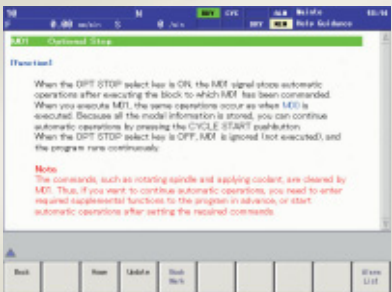

Network Function

Data Server (F31i-A Standard Function)

Large machining programs can be transferred to the data server through the network connected to the host computer at high speed. The transferred machining programs are executed as the main program or the sub program called up with the M198.

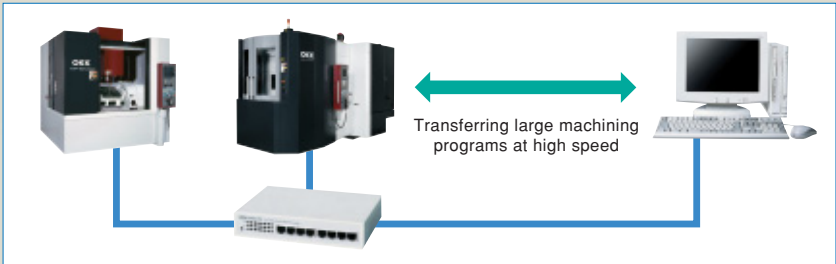


Setup Support Function


Tool Support [Standard]

You can manage each tool's various information such as the tool name, schematic and offset number comprehensively through a single screen. It contains the functions that are convenient for the set-up operation. For example the tool measurement is also available by just switching the menu.

Tool Setup Screen

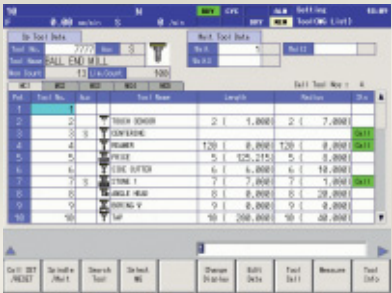

Tool Length Offset Measurement Screen

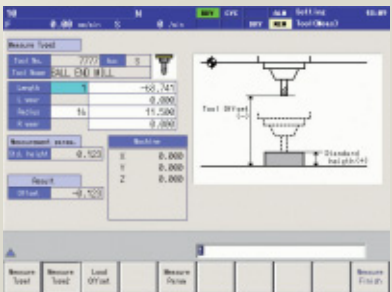

Hard Disc Mode (N730 Standard Function)


Large machining programs can be transferred to the hard disc installed in the machine through the network connected to the host computer at high speed. The transferred machining programs are executed as the main program or the sub program.

Programming Support Function


Program Editor [Standard]

It enables editing of the programs in the NC memory, data server (or hand disc) and memory card. It also enables managing the programs i.e. copying, deleting, changing the program name, etc.


- Two programs can be displayed side by side.
- Batch conversion of certain characters in a program is possible. (Example: Change from "F1000" to "F1200")
- The data of the multiple lines in one program can be copied easily to another program.

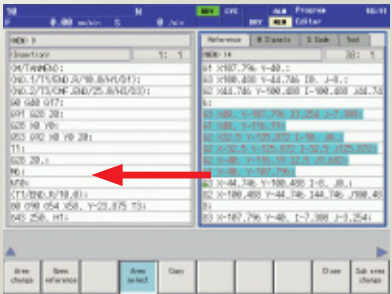

- By switching the right-side reference screen, you can view a list of the M signals or G-codes or the data regarding the tools in the magazine.

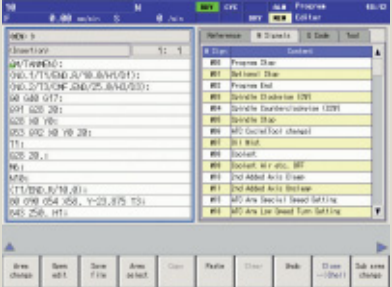

- You can easily copy and delete the programs and change the program name.
- By using the multiple file batch copy function, you can easily make backup copies of the NC memory's or hard disc's programs in a memory card.

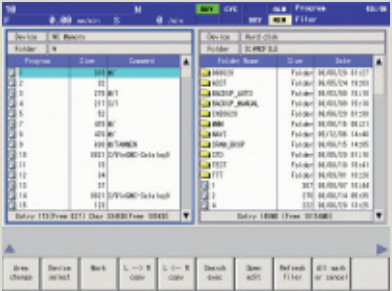

## Specifications

## ● Main Specifications

| Item   | Unit              | Specification                        |
|--|-------------------|--------------------------------------|
| Travel on X axis (Table right/left)  | mm                | 1050 (41.34")                        |
| Travel on Y axis (Saddle back/forth)   | mm                | 530 (20.87")                         |
| Travel on Z axis (Spindle head up/down)  | mm                | 510 (20.08")                         |
| Distance from table top surface to spindle nose  | mm                | 150 (5.91") ~660 (25.98")            |
| Distance from column front to spindle center   | mm                | 616 (24.25")                         |
| Table work surface area (X-axis direction × Y-axis direction)                                | mm                | 1260 (49.61") ×600 (23.62")          |
| Max. workpiece weight loadable on table  | kg                | 1200 (2646 lbs)                      |
| Table work surface configuration<br>(T-slot nominal dimension × spacing × number of T slots) | mm                | 18 (0.71") ×110 (4.33") ×5 slots     |
| Distance from floor to table work surface  | mm                | 900 (35.43")                         |
| Spindle speed  | min <sup>-1</sup> | 100~20000                            |
| Number of spindle speeds   |                   | Electric 2 steps (MS)                |
| Spindle nose (nominal number)  |                   | 7/24-tapered No.40                   |
| Spindle bearing bore diameter  | mm                | φ65 (2.56")                          |
| Rapid traverse rate  | m/min             | X/Y/Z:20 (787 ipm)                   |
| Cutting feed rate  | mm/min            | X/Y/Z:1~20000 (0.04 to 787ipm)*1     |
| Automatic Tool Changer (ATC)   |                   |                                      |
| Type of Tool shank   |                   | BT40 (Dual-contact BT type)          |
| Type of Pull stud  |                   | MAS 403 P40T-1                       |
| Number of stored tools   | tools             | 30                                   |
| Max. tool diameter (with tools in adjacent pots)   | mm                | φ80 (3.15")                          |
| Max. tool diameter (with no tools in adjacent pots)  | mm                | φ110 (4.33")                         |
| Max. tool length (from gauge line)   | mm                | 350 (13.78")                         |
| Max. tool mass [moment]  | kg [N·m]          | 10 (22 lbs) [9.8 (7.2 ft·lbs) ]      |
| Tool selection method  |                   | Memory random method                 |
| Tool exchange time (tool-to-tool)  | sec               | 2.0                                  |
| Tool exchange time (cut-to-cut)  | sec               | 5.5                                  |
| Motor  |                   |                                      |
| Spindle motor (30-min rating/continuous rating)  | kW                | 15/11 (20/15HP)                      |
| Feed motors  | kW                | MITSUBISHI X/Y:3 (4HP) Z:3.5 (4.7HP) |
|  |                   | FANUC X/Y:3 (4HP) Z:4 (5.4HP)        |
| Coolant pump motor   | kW                | 0.4 (0.5HP)                          |
| Spindle head cooling pump motor  | kW                | 0.4 (0.5HP)                          |
| Motor for coil-type chip conveyor  | kW                | 0.1 (0.13HP) × 2                     |
| Motor for ATC  | kW                | 0.4 (0.5HP)                          |
| Required power sources   |                   |                                      |
| Power supply   | kVA               | MITSUBISHI 31                        |
|  |                   | FANUC 29                             |
| Supply voltage   | V                 | AC200V±10% AC220V±10%                |
| Supply frequency   | Hz                | 50/60Hz±1Hz 60Hz±1Hz                 |
| Compressed air supply pressure   | MPa               | 0.4~0.6 (58~87 psi)*2                |
| Compressed air supply flow rate  | L/min (ANR)       | 400 (106 gal /ipm)*2 *3              |
| Spindle cooling oil tank capacity  | L                 | 50 (13 gal)                          |
| Coolant tank capacity  | L                 | 260 (69 gal)                         |
| Machine height (from floor surface)  | mm                | 2,910 (114.57")                      |
| Floor space required for operation (width × depth)   | mm                | 2595 (102.17") ×2750 (108.27")       |
| Required floor space incl. maintenance area (width × depth)                                  | mm                | 3600 (141.73") ×3700 (145.67")       |
| Machine weight   | kg                | 6800 (15000 lbs)                     |
| Operation environment temperature  | °C                | 5~40                                 |
| Operation environment humidity   | %                 | 10~90 (No dew)                       |

※1: The rate under the HQ or hyper HQ control

※2: The value for the standard specification It may vary with added options.

※3: Purity of the supplied air should be equivalent to Class 3.5.4 specified in ISO 8573-1/JIS B8392-1 or higher.

## ● Standard Accessories

| Item   | Qty    | Remark   |
|--|--------|--|
| Spindle speed 20000min <sup>-1</sup>   | 1 set  |  |
| Compatibility with Dual-contact tool   | 1 set  | BT type  |
| Linear scale   | 1 set  | For X, Y and Z axes                              |
| Illuminating lamp  | 1 set  |  |
| Coolant unit (Separate coolant tank)   | 1 set  | Tank capacity:260L (69gal)                       |
| Entire machine cover<br>(Splash guard)   | 1 set  | Including front door and<br>electromagnetic lock |
| Magazine safety cover  | 1 set  | Including<br>electromagnetic lock                |
| Sliding surface protection steel<br>sliding cover for X/Y axes                                 | 1 set  |  |
| Spindle head cooling oil<br>temperature controller   | 1 set  |  |
| Coil-type chip conveyor  | 2 sets | 1 set for each of front<br>and rear sides        |
| Leveling block   | 1 set  |  |
| Parts for machine transfer   | 1 set  |  |
| Automatic power-off unit<br>(with M02 or M30)  | 1 set  |  |
| Electric spare parts (fuses)   | 1 set  |  |
| Instruction manual<br>(Specification, Maintenance Manual,<br>Foundation & Installation Manual) | 1 set  |  |
| Electrical instruction manuals<br>(including Hardware Diagram)                                 | 1 set  |  |


### ●Special Accessories

| Item  | Specification   |
|---|---|
| Compatibility with Dual-contact tool            | HSK-A63   |
| Number of stored tools                          | 36  |
| Raised column(Column-up)                        | 250mm (9.84")   |
| Signal lamp                                     | Two-lamp type / Three-lamp type   |
| Flushing chips with coolant                     | 400W (0.5HP)<br>(Standard coil-type chip conveyor is removed)   |
| Lift-up type chip conveyor                      | Hinged type / Scraper type /<br>Scraper type with floor magnet /<br>Backwashing filtration (Drum filter)<br>type for aluminum chips |
| Compatibility with through-spindle※1            | 2MPa (290psi) / 7MPa (1015psi) / Air  |
| Oil-mist / Air blow nozzle                      |   |
| Air blow nozzle                                 |   |
| Minimal quantity lubrication system             |   |
| Workpiece flushing equipment                    | Shower-gun type   |
| ATC shutter                                     |   |
| Splash guard's top cover                        | Including magazine cover  |
| Foundation parts                                | Bond anchor type  |
| Bond for foundation work                        | 1kg (2.2lbs)  |
| Sub-table                                       | T-slot type / Specified by customer   |
| NC rotary table                                 | Rotary table type   |
| Mist collector                                  | 2.2kW(3HP), installed separately  |
| Coolant cooler                                  | Separately installed type /<br>High-pressure unit integrated type<br>(High-pressure unit is required separately)                    |
| Touch Sensor system                             | Workpiece measurement /<br>Tool length measurement / Tool break   |
| Additional illuminating lamp inside the machine | 1 lamp  |


※1: Be sure to use the pull stud with no hole when the through-spindle is not used.

## Dimensions


### Front View

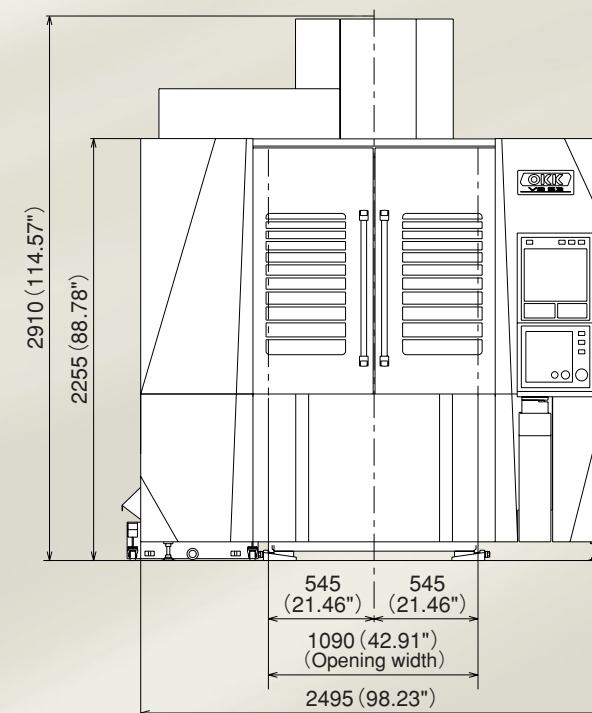


### Side View

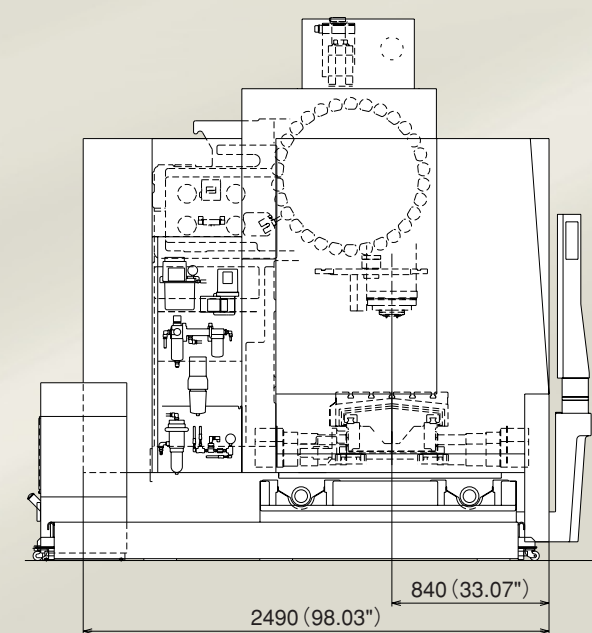


## Floor Space

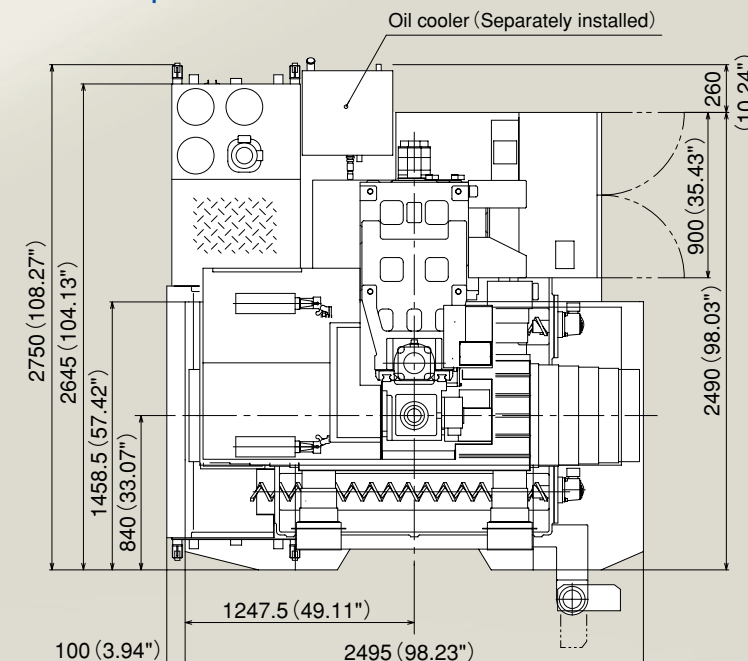

## Table

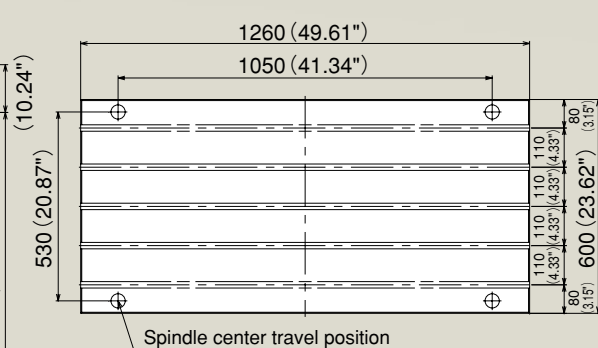

## T-slot





N730

Standard Specification

No. of controlled axes: 3 axes (X, Y, Z)  
No. of simultaneously controlled axes: 3 axes  
Least input increment: 0.001mm / 0.0001"  
Least control increment: 1nm  
Max. programmable dimension:  
±99999.999mm/±9999.9999"  
Absolute / Incremental programming: G90 / G91  
Decimal point input I / II  
Inch / Metric conversion: G20 / G21  
Program code: ISO / EIA automatic discrimination  
Program format: Meldas standard format  
(M2 format needs to be instructed)  
Positioning: G00  
Linear interpolation: G01  
Circular interpolation: G02 / G03 (CW / CCW)  
(Including radius designation)  
Cutting feed rate: 5.3-digit F-code, direct command  
One digit F-code feed  
Dwell: G04  
Manual handle feed: Manual pulse generator  
1 set (0.001, 0.01, 0.1mm)  
Rapid traverse override: 0 / 1 / 10 / 25 / 50 / 100%  
Cutting feed rate override: 0 to 200% (every 10%)  
Feed rate override cancel: M49 / M48  
Rigid tap cycle: G84, G74  
Part program storage capacity: 160m [60KB]  
No. of registered programs: 200  
Part program editing  
Background editing  
Buffer modification  
Color touch-panel display  
(15” LCD/QWERTY key MDI)  
Integrating time display  
Clock function  
User definable key  
MDI (Manual Data Input) operation  
Menu list  
Parameter/Operation/Alarm guidance  
Ethernet interface  
IC card/USB memory interface  
IC card driving  
Hard disc mode  
Spindle function: 5-digit S-code direct command  
Spindle speed override: 50 to 150% (every 5%)  
Tool function: 4-digit T-code direct command  
ATC tool registration  
Miscellaneous function: 3-digit M-code programming  
Multiple M-codes in 1 block: 3 codes (Max 20 settings)  
Tool length offset: G43, G44  
Tool position offset: G45 to G48  
Cutter compensation: G38 to G42  
Tool offset sets: 200 sets  
Tool offset memory II : tool geometry and wear offset  
Manual reference position return  
Automatic reference position return: G28 / G29  
2nd to 4th reference position return: G30 P2 to P4  
Reference position return check: G27  
Automatic coordinate system setting

Coordinate system setting: G92  
Machine coordinate system: G53  
Selection of workpiece coordinate system: G54 to G59  
Local coordinate system: G52  
Program stop: M00  
Optional stop: M01  
Optional block skip: /  
Dry run  
Machine lock  
Z-axis feed cancel  
Miscellaneous function lock  
Program number search  
Sequence number search  
Program restart function  
Cycle start  
Auto restart  
Single block  
Feed hold  
Manual absolute on / off: parameter  
Machining time computation  
Automatic operation handle interruption  
Manual numerical command  
Sub program control  
Canned cycle: G73, G74, G76, G80 to G89  
Linear angle designation  
Circular cutting  
Parameter mirror image  
Programmable mirror image  
Variable command: 200 sets  
Automatic corner override  
Exact stop check / mode  
Programmable data input: G10 / G11  
3D solid program check  
Graphic display check  
Backlash compensation  
Memory pitch error compensation  
Manual tool length measurement  
Emergency stop  
Data protection key  
NC alarm display  
Machine alarm message  
Stored stroke limit I / II  
Load monitor  
Self-diagnosis  
Absolute position detection

Optional Specification

Additional one axis control:  
name of axis (A, B, C, U, V, W)  
Additional two axes control:  
name of axis (A, B, C, U, V, W) ※  
Simultaneously controlled axes: 4 axes  
Simultaneously controlled axes: 5 axes ※  
Program format: M2 / M0 format  
Unidirectional positioning: G60 STD  
Helical interpolation STD  
Cylindrical interpolation  
Hypothetical axis interpolation  
Spiral/Conical interpolation

NURBS interpolation  
(Hyper HQ control mode II is required)  
Handle feed 3 axes (Standard pulse handle is removed)  
Part program storage capacity:1280m [500KB] (1000) STD  
Part program storage capacity:2560m [1MB] (1000)  
Part program storage capacity:5120m [2MB] (1000)  
Computer link B: RS232C  
Spindle contour control (Spindle position control)  
3-dimensional cutter compensation  
Tool offset sets: 400 sets  
Tool offset sets: 999 sets  
Extended workpiece coordinate system selection  
(48 sets) : G54.1 P1 to P48  
Extended workpiece coordinate system selection  
(96 sets) : G54.1 P1 to P96  
Optional block skip: Total 9  
Tool retract and return  
Sequence number comparison and stop  
Corner chamfering / corner R: Insert into straight  
line-straight line / straight line-circle arc STD  
User macro and user macro interruption STD  
Variable command: 600 sets in total STD  
Pattern rotation  
Programmable coordinate system rotation:  
G68, G69 / G68.1, G69.1 STD  
Parameter coordinate system rotation STD  
Special canned cycles: G34 to G36, G37.1 / G34 to G37  
Scaling: G50, G51  
Chopping function  
Playback  
Skip function: G31 STD  
Automatic tool length measurement: G37 / G37.1  
Tool life management II : 200 sets  
Additional tool life management sets: 400 in total  
Additional tool life management sets: 600 in total  
Additional tool life management sets: 800 in total  
Additional tool life management sets: 1000 in total  
External search  
(Standard for the machine with APC)  
RS232C interface: RS232C-1CH  
●STD: Standard specification for VB53

Original OKK Software

Machining support integrated software  
(incl. help guidance, etc.) ..... STD  
Tool support ..... STD  
Program Editor ..... STD  
EasyPRO ..... STD  
HQ control ..... STD  
Hyper HQ control mode II ..... STD  
WinGMC7 ..... OP  
Soft Scale II m ..... STD  
Touch sensor T0 software ..... OP  
Tool failure detection system (Soft CCM) ..... OP  
Adaptive control (Soft AC) ..... OP  
Automatic restart at tool damage ..... OP  
Cycle mate F ..... OP  
●Item with ※ Require N750 controller

F31i-A

Standard Specification

No. of controlled axes: 3 axes (X, Y, Z)  
No. of simultaneously controlled axes: 3 axes  
Least input increment : 0.001mm / 0.0001"  
Max. programmable dimension:  
±999999.999mm / ±39370.0787"  
Absolute / Incremental programming: G90 / G91  
Decimal point input / Pocket calculator type  
decimal point input  
Inch / Metric conversion: G20 / G21  
Program code: ISO / EIA automatic discrimination  
Program format: FANUC standard format  
Nano interpolation (internal)  
Positioning: G00  
Linear interpolation: G01  
Circular arc interpolation: G02/G03  
(CW/CCW) (Including radius designation)  
Cutting feed rate:  
6.3-digit F-code, direct command  
Dwell: G04  
Manual handle feed: manual pulse generator 1 set  
(0.001, 0.01, 0.1mm)  
Rapid traverse override: 0 / 1 / 10 / 25 / 50 / 100%  
Cutting feed rate override: 0 to 200% (every 10%)  
Feed rate override cancel: M49 / M48  
Rigid tapping: G84, G74 (Mode designation: M29)  
Part program storage capacity: 160m [64KB]  
No. of registered programs: 120  
Part program editing  
Background editing  
Extended part program editing  
10.4-inch color LCD  
Clock function  
MDI (manual data input) operation  
Memory card interface  
Spindle function: 5-digit S-code direct command  
Spindle speed override: 50 to 150% (every 5%)  
Tool function: 4-digit T-code direct command  
ATC tool registration  
Auxiliary function: 3-digit M-code programming  
Multiple M-codes in 1 block: 3 codes (Max 20 settings)  
Tool length offset: G43, G44/G49  
Tool diameter and cutting edge  
R compensation: G41, G42/G40  
Tool offset sets: 99 sets  
Tool offset memory C  
Manual reference position return  
Automatic reference position return: G28/G29  
2nd reference position return: G30  
Reference position return check: G27  
Automatic coordinate system setting  
Coordinate system setting: G92  
Machine coordinate system: G53  
Workpiece coordinate system: G54 to G59  
Local coordinate system: G52  
Program stop: M00  
Optional stop: M01  
Optional block skip: /  
Dry run

Machine lock  
Z-axis feed cancel  
Auxiliary function lock  
Graphic display  
Program number search  
Sequence number search  
Program restart  
Cycle start  
Auto restart  
Single block  
Feed hold  
Manual absolute on/off: parameter  
Sub program control  
Canned cycle: G73, G74, G76, G80 to G89  
Mirror image function: parameter  
Automatic corner override  
Exact stop check/mode  
Programmable data input: G10  
Backlash compensation for each rapid traverse  
and cutting feed  
Smooth backlash  
Memory pitch error compensation (interpolation type)  
Skip function  
Tool length manual measurement  
Emergency stop  
Data protection key  
NC alarm display / alarm history display  
Machine alarm display  
Stored stroke check 1  
Load monitor  
Self-diagnosis  
Absolute position detection

Optional Specification

15” color LCD  
Additional one axis control:  
name of axis (A, B, C, U, V, W)  
Additional two axes control:  
name of axis (A, B, C, U, V, W) ※  
No. of simultaneously controlled axes: 4 axes  
No. of simultaneously controlled axes: 5 axes ※  
Least input increment: 0.0001mm / 0.00001"  
FS15 tape format  
Unidirectional positioning: G60  
Helical interpolation STD  
Cylindrical interpolation  
Hypothetical axis interpolation  
Spiral/Conical interpolation  
Smooth interpolation  
(Hyper HQ control B mode is required)  
NURBS interpolation  
(Hyper HQ control B mode is required)  
Involute interpolation  
One-digit F code feed  
Handle feed 3 axes (Standard pulse handle is removed)  
Part program storage capacity:  
1280m [512KB] (1000 in total)  
Part program storage capacity: STD  
2560m [1MB] (1000 in total)

Part program storage capacity:  
5120m [2MB] (1000 in total)  
Part program storage capacity:  
10240m [4MB] (1000 in total)  
Part program storage capacity:  
20480m [8MB] (1000 in total)  
Data server: ATA card (1GB) STD  
Data server: ATA card (4GB)  
Spindle contour control (Cs contour control)  
Tool position offset  
3-dimensional cutter compensation  
Tool offset sets: 200 sets in total  
Tool offset sets: 400 sets in total  
Tool offset sets: 499 sets in total  
Tool offset sets: 999 sets in total  
Addition of workpiece coordinate system  
(48 sets in total) : G54.1 P1 to P48  
Addition of workpiece coordinate system  
(300 sets in total) : G54.1 P1 to P300  
Machining time stamp  
Optional block skip: Total 9  
Tool retract and return  
Sequence number comparison and stop  
Manual handle interruption  
Programmable mirror image STD  
Optional chamfering / corner R  
Custom macro STD  
Interruption type custom macro  
Addition of custom macro common variables: 600  
Figure copy  
Coordinate system rotation: G68, G69 STD  
Scaling: G50, G51  
Chopping  
Playback  
Automatic tool length measurement: G37 / G37.1  
Tool life management: 256 sets in total  
Addition of tool life management sets: 1024 sets in total  
High-speed skip  
Run hour and parts count display STD  
RS232C interface: RS232C-1CH  
Manual Guide i (Basic)  
Manual Guide i (Milling cycle)  
●STD: Standard specification for VB53

Original OKK Software

Machining support integrated software  
(incl. help guidance, etc.) ..... STD  
Tool support ..... STD  
Program Editor ..... STD  
EasyPRO ..... STD  
HQ control ..... STD  
Hyper HQ control mode B ..... STD  
Special canned cycle (including circular cutting) ... OP  
Soft Scale II m ..... STD  
Touch sensor T0 software ..... OP  
Tool failure detection system (Soft CCM) ..... OP  
Adaptive control (Soft AC) ..... OP  
Automatic restart at tool damage ..... OP  
Cycle mate F ..... OP  
●Item with ※ Require F31i-A5 controller